

BK200SCP

Nickel Metal Hydride

Features & Benefits

- Efficient, lower cost charge requirements with excellent cycle life.
- Options for broader operating temperatures.
- Versatile Applications including: Security, Medical, Automotive and Industrial Infrastructure.
- Higher levels of energy density, demanded by today's electronics.
- No transportation issues.
- Cells designed specifically to meet different, rigorous environments.

Specifications

Nominal


Capacity:	2100 mAh Typical
Nominal Voltage:	1.2V
Weight:	Approximately 42g
Operating Temperature:	0°C - +45°C

Dimensions





Unit: mm

Typical Charge Characteristics

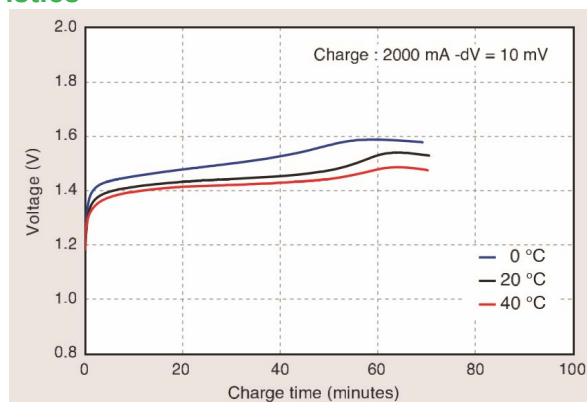

Typical Discharge Characteristics

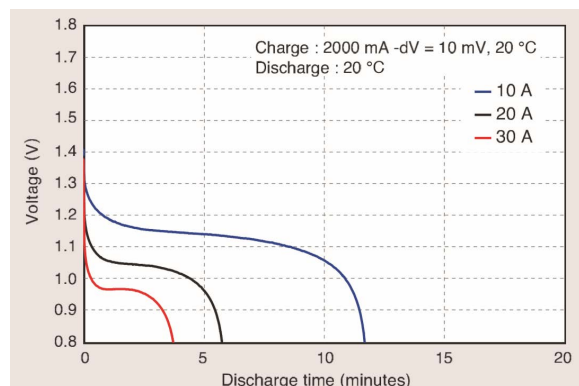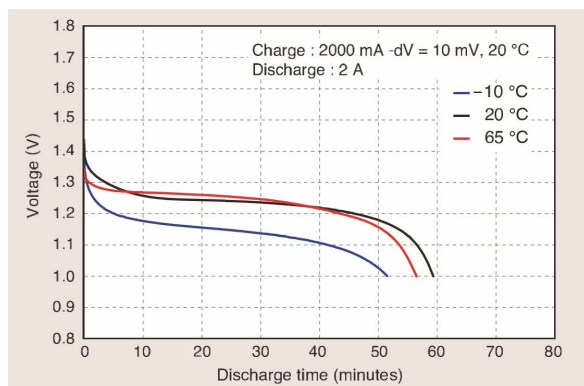

For more information on how Panasonic can assist you with your battery power solution needs call **877-726-2228**, visit www.na.industrial.panasonic.com/products/batteries or e-mail oembatteries@us.panasonic.com.

The data in this document is for descriptive purposes only and is not intended to make or imply any guarantee or warranty.