


Air Plasma Cutting Torches / Genuine Parts

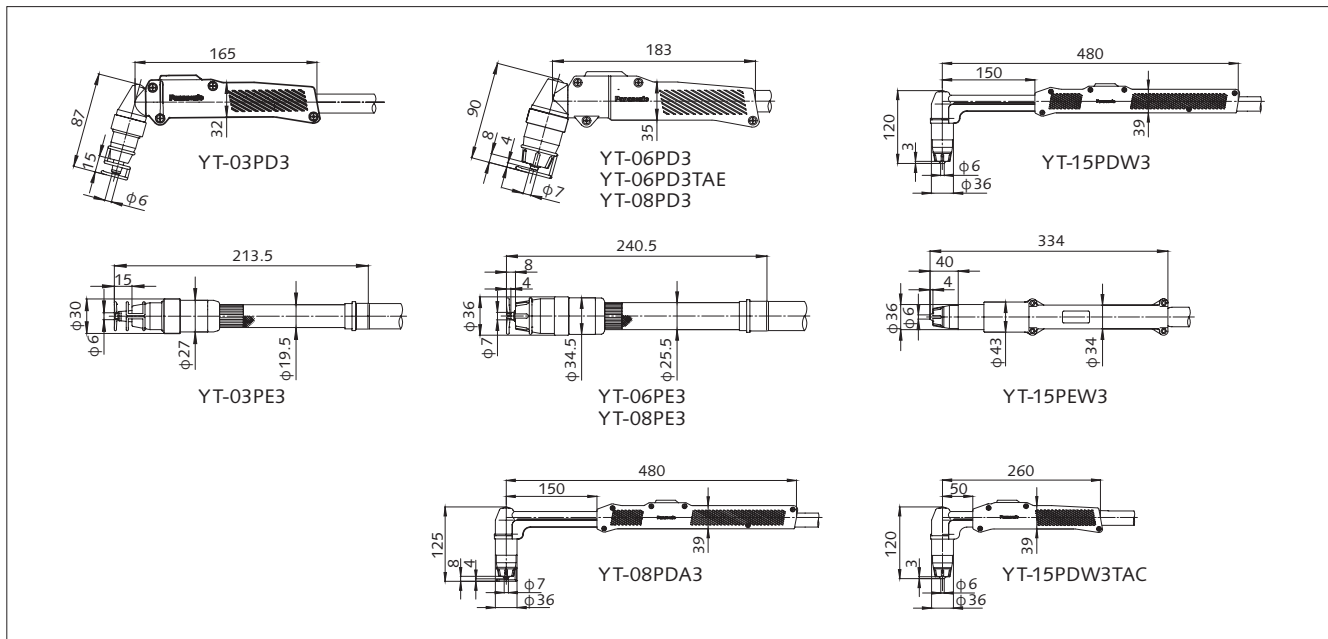

Type of power source					Full Digital			Inverter				
					YP-035PF3	YP-060PF3	YP-080PF3	YP-030PA2	YP-060PA2	YP-130PF1	200TRCT00	
Torch part number (typical model)			Cable length	Duty cycle	Cooling system	Compatibility table						
35 A	YT-03PD3	Curved shape	10 m	60 %	Air-cooled	●			● ^{*1}			
	YT-03PE3	Pencil shape				●						
	YT-03PD3CB0	Curved shape	20 m			●	● ^{*1*2}					
	YT-03PE3CB0	Pencil shape				●						
	YT-03PD3CC0	Curved shape	30 m			●	● ^{*1*2}					
	YT-03PE3CC0	Pencil shape				●						
60 A	YT-06PD3	Curved shape	10 m	100 %			●				●	
	YT-06PD3TAE	Curved shape						●				
	YT-06PE3	Pencil shape	20 m				●					
	YT-06PD3CB0	Curved shape					●	● ^{*2}		●		
	YT-06PE3CB0	Pencil shape	30 m				●					
	YT-06PD3CC0	Curved shape					●	● ^{*2}		●		
	YT-06PE3CC0	Pencil shape					●					
80 A	YT-08PD3	Curved shape	10 m			Water-cooled			●			
	YT-08PE3	Pencil shape						●				
	YT-08PDA3	Curved shape (long)	20 m		● ^{*3}		● ^{*4}	●				
	YT-08PD3CB0	Curved shape						●				
	YT-08PE3CB0	Pencil shape	30 m					●				
	YT-08PD3CC0	Curved shape						●				
	YT-08PE3CC0	Pencil shape						●				
	150 A	YT-15PDW3	Curved shape (long)	10 m	Water-cooled						●	
YT-15PDW3TAC		Curved shape (short)								●		
YT-15PEW3		Pencil shape	20 m								●	
YT-15PDW3TAA		Curved shape									● ^{*5}	
YT-15PEW3TAA		Pencil shape	30 m								● ^{*5}	
YT-15PDW3TAB		Curved shape									● ^{*5}	
YT-15PEW3TAB		Pencil shape									● ^{*5}	

*1: Requires treatment of torch pilot wire.

*2: Can be used when an external compressor is connected.

*3: Can be used at a water head height of 10 m or less.

*4: Use tip for 40 A (contact cutting only).

*5: Use tip for 60 A.