

# BR3032

# LITHIUM POLY-CARBONMONOFLUORIDE


### Features & Benefits

- High voltage of 3 volts
- Extremely small self-discharge for long service and shelf life
- Compact and lightweight with extremely high energy density per unit weight
- Strong load pulse characteristics


### Specifications

|                        |                    |
|------------------------|--------------------|
| Nominal Capacity:      | 500 mAh            |
| Nominal Voltage:       | 3V                 |
| Weight:                | Approximately 5.5g |
| Operating Temperature: | -30°C - +80°C      |


### Dimensions




### Temperature Characteristics

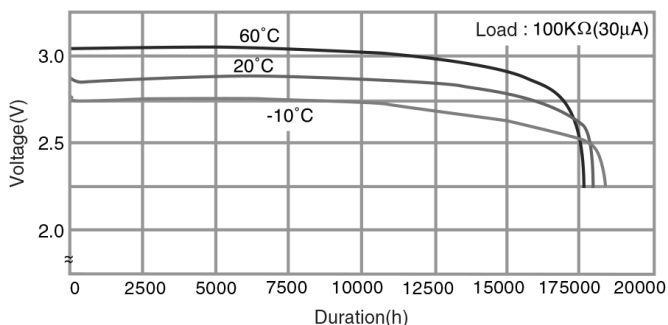

### Capacity vs. Load Resistance

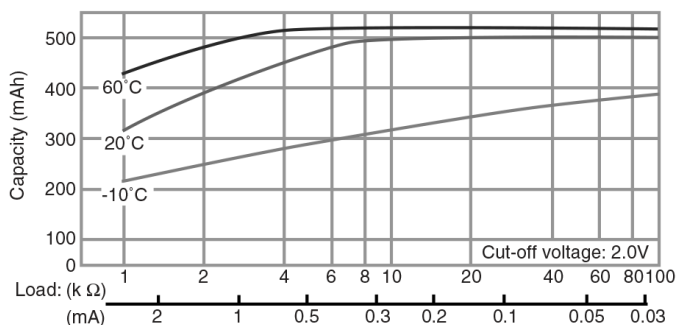

### Operating Voltage vs. Load Resistance (voltage at 50% discharge depth)

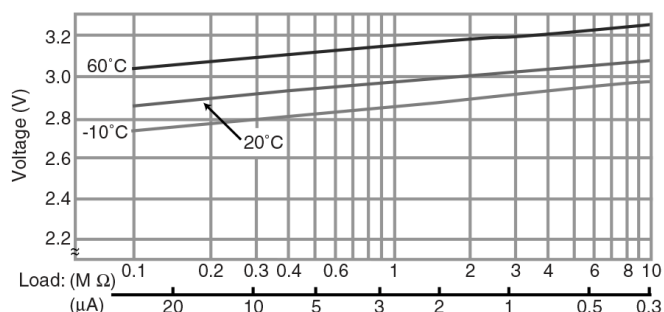

### WARNING

Serious harm in as little as 2-hours if swallowed. **KEEP AWAY FROM CHILDREN.** Seek immediate medical help if swallowed. Have the doctor call the poison center at 1-(800) 222 1222.

Product manufacturers should design their products to meet the safety requirements of Annex I of UL60065 or equivalent standards.